

DD1012PI

Czujka dualna 12m,9 kurtyn, PIR+MW, odporna na zwierzęta do 20kg

Patented range gated radar technology

Motion sensors of the DD1000 Series incorporate a Carrier Fire & Security patented and unique range gated radar technology allowing the installer to define a clear borderline of the radar range as the radar is used to measure distance between the sensor and moving objects. Effectively the end-user will get rid of any nuisance alarms generated by movements outside the detection pattern.

Every motion sensor comes with 4 possible radar ranges selectable via dip switches allowing the detection pattern to be tailored according to the room where the motion sensor is installed.

The radar operates on 5.8GHz frequency and will not interfere with any WiFi networks.

PIR technology in combination with patented mirror optics

Our patented optical mirror technology gives the advantage of gliding focus, which creates a continuous detection curtain from floor level up to installation height.

Within our DD1012 series we are using a dual element pyro generating 2 volumetric curtains for each of the 9 curtain sets.

The DD1012PI is designed to be immune for pets up to 18 kg of weight (about 35 cm of height).

Detection technologies working together

These dual tech motion sensors generate an alarm depending on what both technologies – range gated radar and PIR – saw within its detection coverage.

But our dual tech go beyond a simple “AND” function : it classifies the signals from each technology – range gated radar and PIR – to have the best alarm result without being sensitive for nuisance signal sources. This technology creates a uniform sensitivity in all course directions.

Ease and flexibility of installation

1. Tolerates wall angle deviation and different mounting heights.
2. Limited loss of coverage when objects are placed in the field of the PIR vision.
3. Easy range setting via dip switches of the range gated radar in order to tailor the detection pattern to your needs.
4. Multiple build-in End-Of-Line resistor values with “easy wiring” option available.
5. Plug-in connector.

Other members of the family

This family includes motion sensors with variants in detection range, two types of anti-masking masking technology and Pet Immunity.

The consistent family aesthetics between the various models ensure a professional approach when installing different sensor types.



Details

- Patented selectable range gated radar technology clearly defining the radar detection border
- PIR technology with patented mirror curtain optics
- Pet Immunity up to 18 kg (ca. 35 cm height)
- Intelligent alarm decision based on signal classification of the PIR and radar alarm
- Automatic continuous self diagnostics on all technologies
- Green mode : option to switch off the radar technology when the security system is not armed
- Holding several security approvals including EN Grade II and UL/ULc

DD1012PI

Czujka dualna 12m,9 kurtyn, PIR+MW, odporna na zwierzęta do 20kg

Technical specifications

General

Technologia	Dualna
Anti masking	Nie
Nieczuła na zwierzęta	Tak
Camera	Nie
Zestaw sygnalizacji wyważenia	ST400
Czas rozruchu czujki	60 s

Detection

Max. detection range	12 m
Wybór zasięgu detekcji	4, 6, 9, or 12 m selectable via dip switches
Pole widzenia	78°
Ochrona przed przeczołganiem	Tak
Liczba kurtyn	9
Częstotliwość mikrofal (znam.)	5.8 GHz
Maks. sygnał mikrofalowy (z 1 m)	0.003 μ W/cm ²
Pamięć alarmów	Tak
Czas alarmowania	3 sek
Zakres szybkości celu	0.2 to 3.0 m/s
Odporność na szumy szczytowe	2 V (at 12 VDC)

Wired/wireless

Wired-wireless	Przewodowy
----------------	------------

Inputs/outputs

Charakterystyka przekaźnika alarmowego	NC, 80 mA 30 VDC, Form A
Charakterystyka przekaźnika sabotażowego	NC, 80 mA 30 VDC, Form A
Konfiguracja przekaźnika	Wiele wartości EOL
Linie zdalnego nadzoru	Dzień/Noc, Test krokowy

Electrical

Napięcie znamionowe	9 to 15 VDC (12 V nominal)
Typ zasilacza	12 VDC
Pobór prądu	8 mA nominal

Physical


Wymiary	126 x 63 x 50 mm
Masa netto	120 g
Kolor	Biały
Wysokość montażu	1.8 do 3 m

Environmental

Temperatura pracy	-10 to 55°C
Wilgotność względna	95% max. noncondensing
Środowisko	Pomieszczeniowy
Szczelność IP	IP30 IK04

Standards & regulation

Stopień zabezpieczenia	Grade 2 wg EN50131
------------------------	-----------------------

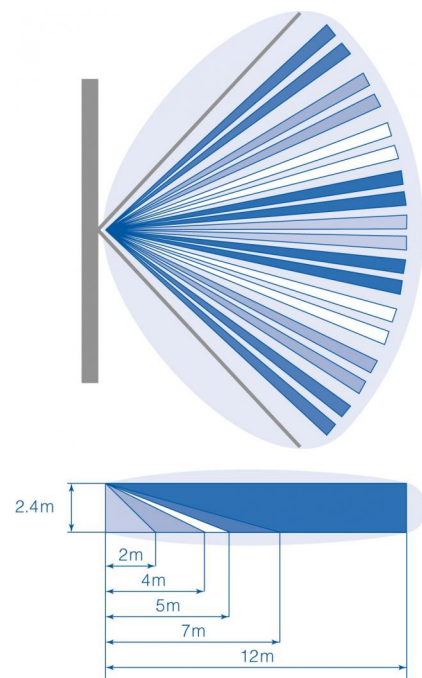

Będąc firmą innowacyjną, Carrier Fire & Security zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronie pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 26 July 2021 - 15:48